

EpdmFIT tiles


Material composition

SBR bound with PU binder and a top layer of approx. 5 mm PU-bonded EPDM rubber

Sizes

Sizes:	500 x 500 mm 1.000 x 1.000 mm	Size tolerance
Thickness:	vlak > 15 mm 20 mm	
	met noppen structuur > 30 mm 40 mm 45 mm	±5%

Colours

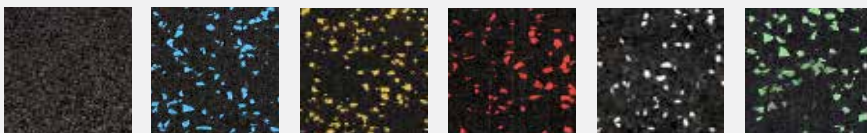

Black Black with 10 % EPDM | 100% EPDM in virious colours
> other colours on request

Density

800 kg/m³

Granulate

standard 1 - 3 mm

extra fine > 0,7 - 1 mm

Fire resistance

Cfl to EN 13501

Smoke resistance

S1

Insolation value

Rd 0,15 EN 13165 | U 3,13 EN 6946

Noise reduction


ΔLw 25 DB EN 10140-1

Garantee

3 year guarantee for wear-resistance, when used at gyms.
The guarantee does not apply to colour



SHOCK
ABSORBING



NOISE
DAMPING



VERY
DURABLE

