

Aslon® FireFIT

Material composition

Recycled rubbergranulate bonded with PU binder, available in black or with an EPDM speckle. With the addition of a fire retardant.


Sizes

Sizes: 500 x 500 mm | 1.000 x 1.000 mm
 Thickness: 15 mm | 20 mm | 30 mm | 40 mm | 45 mm

Sizetolerance

±2%
 ±5%

Colour

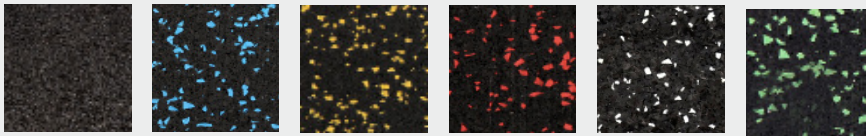

Black Black with 10 % EPDM in various colours

Density

1.000 kg/m³

Granulate

Extra fine 0,7 - 1 mm

Fire resistance

Cfl to EN 13501

Smoke resistance

S1

Insolation value

Rd 0,15 EN 13165 | U 3,13 EN 6946

Noise reduction

ΔLw 25 DB EN 10140-1



Guarantee

3 year guarantee for wear-resistance, when used at gyms.
 The guarantee does not apply to colour.



FIRE RETARDANT



SHOCK ABSORBING



DURABLE



Subject to change. This release replaces all previous versions. Version: 01-01-2025

