

# Aslon® RubberrollFIT

## Material composition


Recycled granulate bound using a PU binding agent and possibly a colouring agent.

## Sizes

Sizes: 1.000 mm | 1.250 mm  
 Thickness: 3 - 10 mm

Sizetolerance  
 ±2%  
 ±5%

## Colour

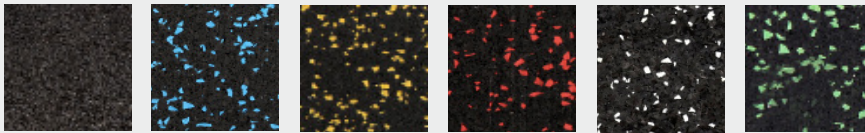

Black      Black with 10% EPDM | various colours on request.

## Density

730 kg/m<sup>3</sup> | 930 kg/m<sup>3</sup> | 1.100 kg/m<sup>3</sup>

## Fire resistance

Efl to EN 13501

## Smoke resistance


S2

## Insulation value

Rd 0.15 EN 13165 | U 3.13 EN 6946

## Guarantee

3 year guarantee for wear-resistance, when used at gyms.



FEW SEAMS



NON-SLIP



EASY TO INSTALL



Subject to change. This release replaces all previous versions. Version: 01-01-2025

