

Aslon® Canted section

Material composition

Recycled granulate bound using a PU binding agent.

Dimensions and thicknesses

1.000 x 100 x 20 mm

1.000 x 200 x 30 mm


1.000 x 200 x 43 mm

See page 2 for more information

Sizetolerance

±5%

Colour



Black

Density

1.000 kg/m³

Granulate

Extra fine 0,7 - 1 mm

Fine 0,7 - 2 mm

Standard 1-3 mm

Fire resistance


Efl to EN 13501

Smoke resistance

S2

Warranty

3 year warranty for wear resistance when used correctly.



EASY TO
INSTALL






ANTI-SLIP



EASY TO
CLEAN



SIZING

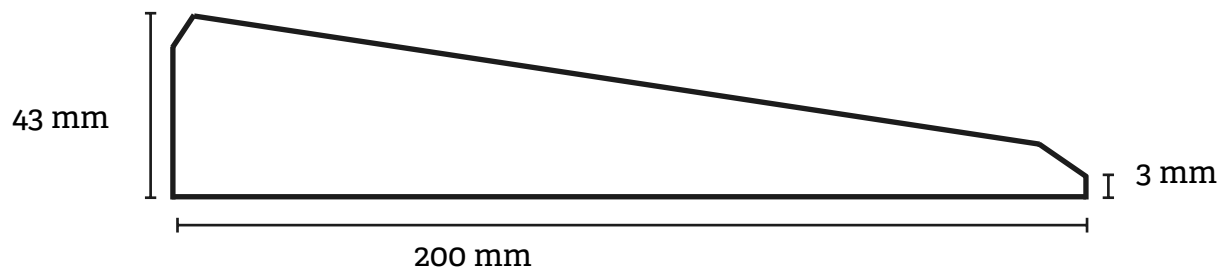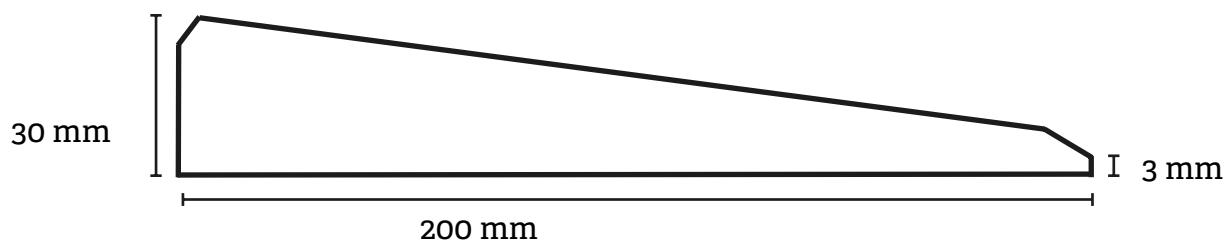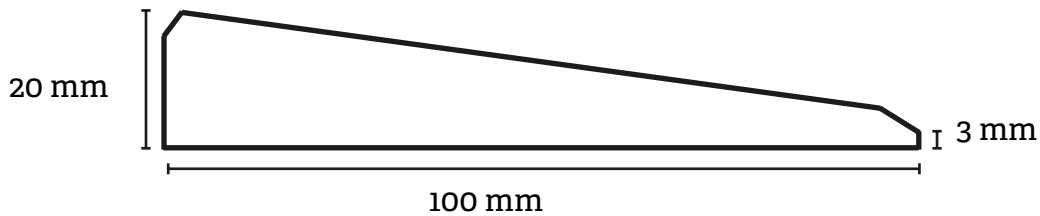

Subject to change. This release replaces all previous versions. Version: 01-01-2025