

Aslon® FireFIT

Material composition

Recycled rubbergranulate bonded with PU binder, available in black or with an EPDM speckle. With the addition of a fire retardant.


Dimensions and thicknesses

Dimensions: 500 x 500 mm | 1.000 x 1.000 mm
Thicknesses: 15 mm | 20 mm | 30 mm | 40 mm | 45 mm

Sizetolerance

±2%
±5%

Colours

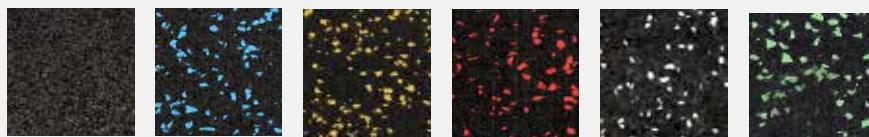

Black

Black with 10 % EPDM in various colours

Density

1.000 kg/m³

Granulate

Extra fine 0,7 - 1 mm

Fire resistance

Cfl to EN 13501

Smoke resistance

S1

Insulation value

Rd 0,15 EN 13165 | U 3,13 EN 6946

Noise reduction

ΔLw 25 DB EN 10140-1



Warranty

3 year warranty for wear resistance when used at gyms.



FIRE
RETARDANT



SHOCK
ABSORBING



DURABLE

