

Hopscotch tiles

Material composition

Recycled granulate bound using a PU binding agent and possibly a colouring agent.
With a number of EPDM rubber

Sizes

Size: 500 x 500 mm | 1.000 x 1.000 mm


Thickness: 20 mm | 30 mm | 40 mm | 45 mm | 55 mm | 65 mm | 100 mm

Sizetolerance

±2%

±5%

Clours

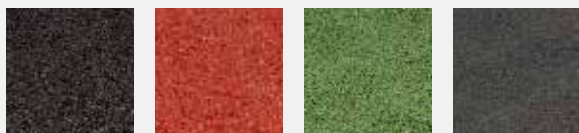

Black

Red

Green

Grey

> numbers available in various RAL colours

Density

800 kg/m³

Granulate

Standard 1 - 3 mm

Fire resistance

Efl to EN 13501

Smoke resistance

S2

Insolation value

Rd 0,15 EN13165 | U 3,13 EN 6946

Noise reduction

ΔLw 25 DB EN 10140-1

Guarantee

3 year guarantee for wear-resistance, when used at playground
The guarantee does not apply to colour

Thickness

30 mm

45 mm

50 mm

65 mm

100 mm

Fall height

1,00 meter

1,37 meter

1,49 meter

1,90 meter

3 meter

