



RUBBER

Aslon® tile supports

Aslon® Rubber tile supports are produced from recycled rubber granulate and are available in various thicknesses and dimensions. The tile supports prevent damage to roofs and ensure drainage is possible beneath the flooring that is placed on the roof. Additionally, irregularities on the roof can be eliminated as different thicknesses are available.


Rubber tile supports are used beneath concrete tiles, natural stone, wood, for wooden decking planks, plastic, wood-composite materials, and for aluminum substructures of solar panels.

There are also tile supports with aluminum foil. Tile supports with aluminum foil offer an excellent solution for installing tiles and installations on PVC roofs. These tile supports have aluminum foil on the bottom to prevent migration of plasticizers.

Aslon Rubber recognizes that the well-being of our planet deserves all the attention. Future generations should be able to live in a healthy environment as well. That's why we manufacture our products from recycled rubber granulate, including from used tires. This allows us to save precious resources, reduce energy consumption, and minimize the emission of harmful substances.



- Colors:** black
- Sizes:** 100 x 100 mm
150 x 150 mm
200 x 200 mm
- Thicknesses:** 10, 15 and 20 mm
- Permeability:** 920 mm/h

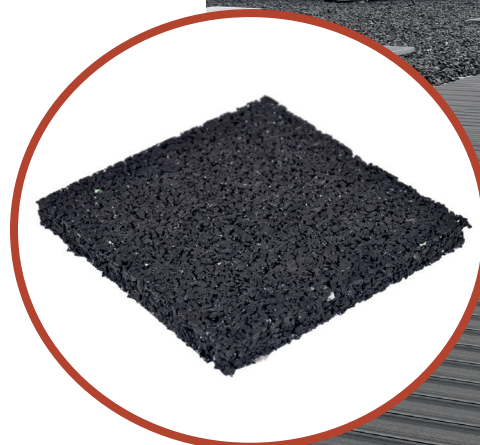

**Protection | Water-permeable | Spacing to allow drainage
Soundabsorbing | Frost resistant | Recyclable**

